

## Benefits of Tenon® High Performance Masonry Products

- Designed to save time and labor over conventional products
- Engineered to meet high performance and challenging application conditions
- Easy to use



Tenon® Masonry Veneer Mortar HB is an ultra-strong mortar that holds up in the toughest conditions (Visit [tenonsolutions.com](http://tenonsolutions.com) for videos)



Tenon® Masonry Veneer Mortar PM can be used for both traditional thick bed scratch and base coats and as bonding mortar

Also check out our  
**Tenon® Burnished Block  
Sealer WB!**



SPEC BLENDED CONSTRUCTION PRODUCTS®

info@tccmaterials.com  
www.tccmaterials.com  
Rev. 01/24


**TENON®**  
HIGH PERFORMANCE MASONRY



WWW.TENONSOLUTIONS.COM

# HIGH PERFORMANCE MASONRY

## MASONRY VENEER MORTAR HB



- For installations of natural stone veneer, thin brick, ceramic tile, quarry, glass, & porcelain
- Superior bonding strength, reducing cracking and pop-offs
- High yield, 40 lb. yields greater than 50 lb. of conventional mortar.
- Interior or exterior use


POT LIFE @ 70°F	3-4 hrs.
ENFORCEMENT	Polymer-modified, fiber-reinforced
APPLICATION THICKNESS	½ inch

## WATERPROOFING & CRACK ISOLATION MEMBRANE




- Flexible with excellent elongation
- Horizontal or vertical applications
- Will not support mold growth
- Ready to use, no mixing required

POT LIFE @ 70°F	1-1 ½ hrs.
VOC CONTENT	<11 g/L
APPLICATION THICKNESS	30 wet mils (16 mils dry)

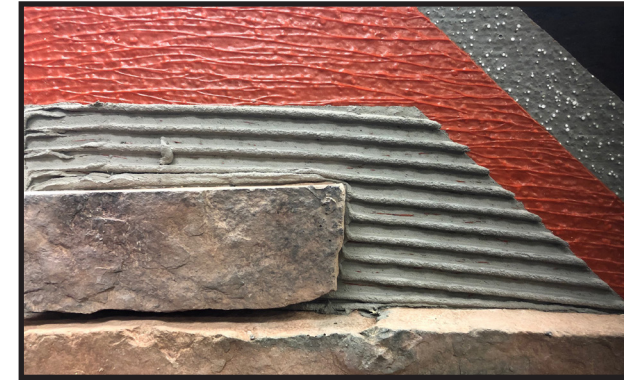

Tenon® Waterproofing & Crack Isolation Membrane protects against moisture penetration while providing crack isolation protection

## MASONRY VENEER MORTAR PM



- For installations of natural stone veneer & masonry veneer
- Excellent bond strength and impact resistance
- Versatile bonding mortar, scratch and brown, or joint grout
- Interior or exterior use

POT LIFE @ 70°F	1 hr.
ENFORCEMENT	Polymer-Modified
APPLICATION THICKNESS	½ inch - ¾ inch

## REFRACTORY MORTAR



- Temperature resistant to 2,550°F
- Interior or exterior applications
- Hydraulic mortar, becomes water insoluble and acid resistant once cured
- Preblended for consistency, non-castable formula

POT LIFE @ 70°F	1 hr.
ENFORCEMENT	Air-Entrained
APPLICATION THICKNESS	Minimum ⅛ inch Maximum ⅝ inch

## MASONRY VENEER JOINT GROUT



- Cementitious grout for tuck-pointing and joint filling between masonry veneer units
- Freeze-thaw durable
- High strength
- Interior or exterior use

POT LIFE @ 70°F	2 hrs.
ENFORCEMENT	Air-Entrained
APPLICATION THICKNESS	Minimum ¼ inch Max 2 inches



Tenon® High-Performance Masonry Veneer Mortars and Grouts provide extreme durability to ensure longevity and peace of mind



Tenon® Refractory Mortar is engineered to withstand heat up to 2,550°F and passes ASTM C199