




# TENON<sup>®</sup>

## Masonry Veneer Mortar HB

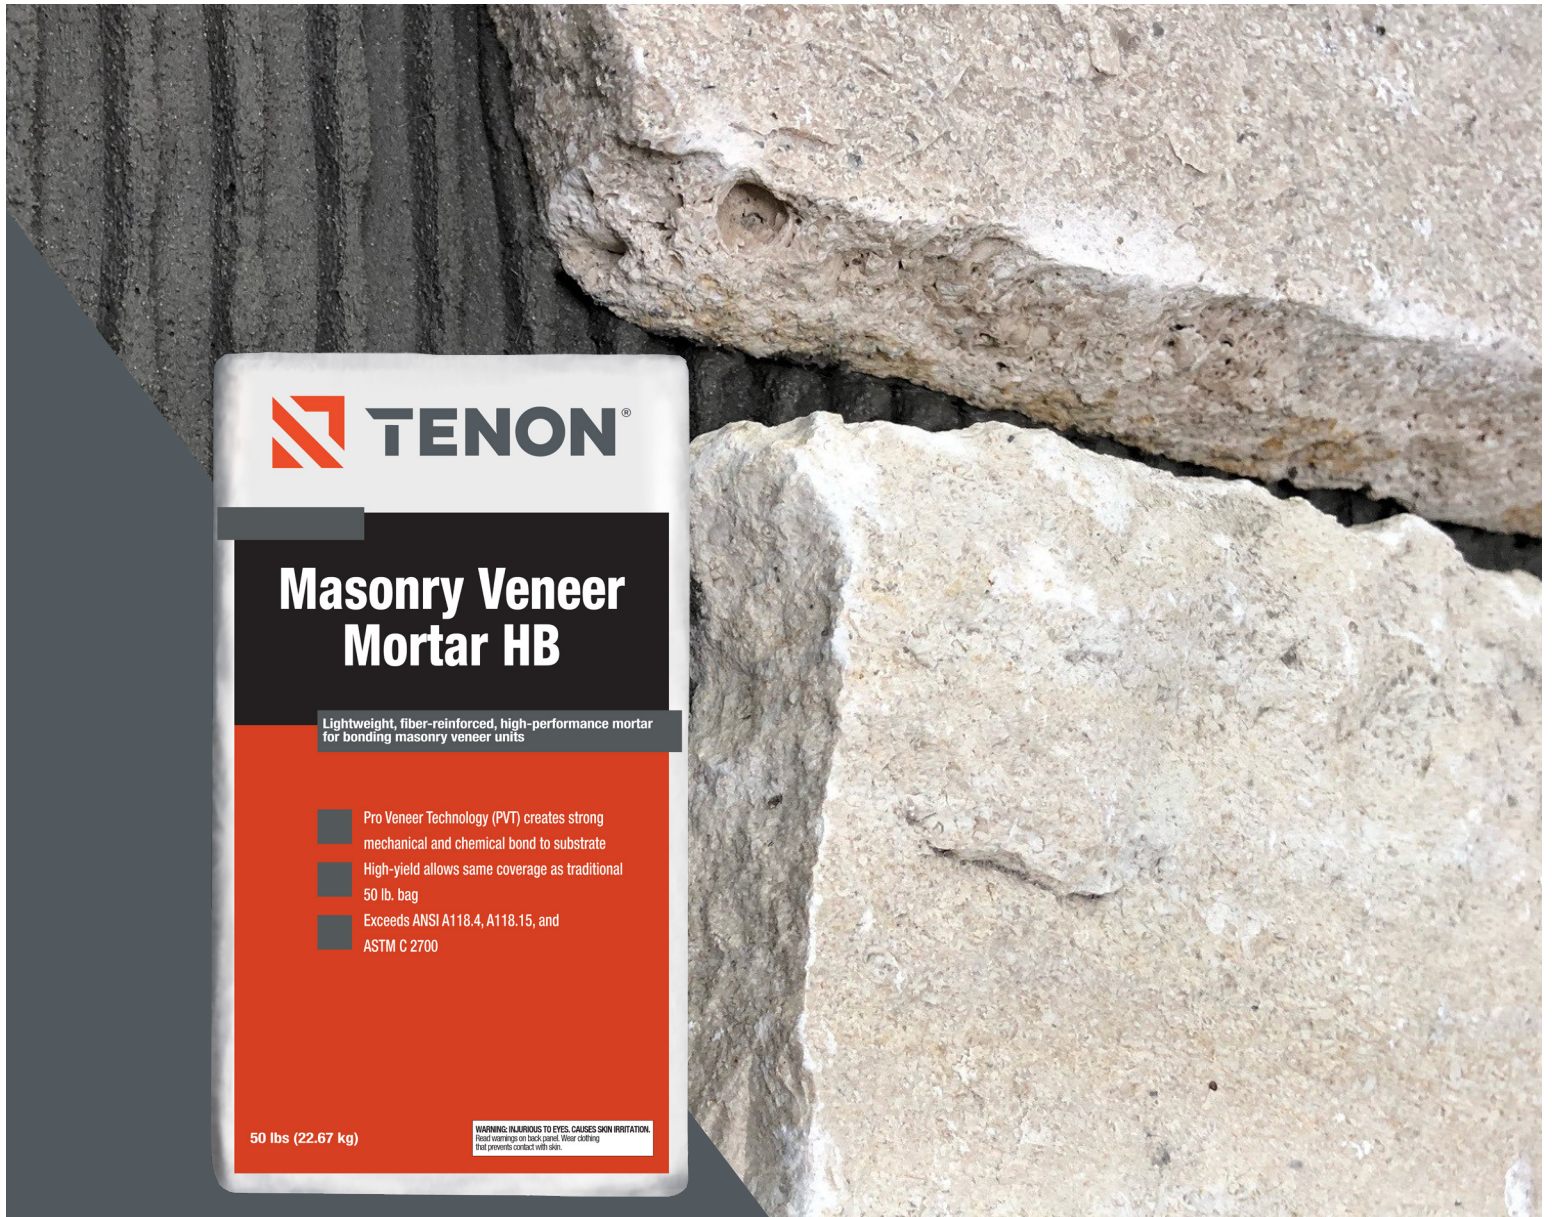

**TENON<sup>®</sup>**

### Masonry Veneer Mortar HB

Lightweight, fiber-reinforced, high-performance mortar for bonding masonry veneer units

- Pro Veneer Technology (PVT) creates strong mechanical and chemical bond to substrate
- High-yield allows same coverage as traditional 50 lb. bag
- Exceeds ANSI A118.4, A118.15, and ASTM C 2700

50 lbs (22.67 kg)

WARNING: IRRITANT TO EYES, CAUSES SKIN IRRITATION. Avoid breathing on back panel. Wear clothing that prevents contact with skin.

## Excellent workability, smooth and creamy

Tenon<sup>®</sup> Masonry Veneer Mortar HB (High-Bond) is a high-yield, lightweight, non-sag, fiber-reinforced, polymer-modified, commercial grade, superior performance Portland cement-based thin-set mortar for adhered installation of masonry veneer stone, thin brick, pavers, natural stone, ceramic, quarry, porcelain, and glass tile.

### Features:

- Superior bonding strength and impact resistance
- Long open time
- Non-sag, non-slump performance
- Reduces cracking and pop-offs
- Excellent resistance to water penetration and efflorescence
- Fiber-reinforced for increased flexural strength and crack resistance



# TENON®

## Masonry Veneer Mortar HB




### Uses

- Setting precast lightweight masonry veneer stone, natural stone, thin natural stone, thin brick veneer, ceramic, quarry, porcelain, and glass tile
- Interior or exterior applications
- Horizontal and vertical applications
- Above- and below-grade applications
- High-yield with greater coverage than typical mortars, 40 lb. (18.1 kg) bag yields as much as a 50 lb. (22.7 kg) bag of conventional stone veneer mortar
- Pre-blended, polymer-modified; just add water, mix, and use

Typical Values - Masonry Veneer Mortar HB	
Mix Ratio (Water to Powder)	4.5 qt. (4.3 L) per 40 lb. (18.1 kg)
Approximate Coverage per 40 lb. (18.1 kg) bag	
Adhered Stone / Masonry Veneer Application Method	30 - 33 sq.ft. (2.8 - 3 m <sup>2</sup> )
1/4" x 3/8" x 1/4" Square Notched Trowel (6 x 9.5 x 6 mm)	65 - 70 sq.ft. (6 - 6.5 m <sup>2</sup> )
1/2" x 1/2" x 1/2" Square Notched Trowel (13 x 13 x 13 mm)	40 - 45 sq.ft. (3.7 - 4.2 m <sup>2</sup> )

### Available In:

Tenon® Masonry Veneer Mortar HB is available in a 40 lb. bag (18.1 kg). Each bag yields approximately 30 - 33 sq. ft. (2.8 - 3 m<sup>2</sup>) of adhered veneer.



40 lb.

BOM #120462

### For professional use only.

It is the responsibility of the installer/applicator to ensure the suitability of the product for its intended use. For technical assistance, please contact TCC Materials. To acquire technical and safety literature, please visit our website.



TCC Materials  
2025 Centre Pointe Blvd  
Mendota Heights, MN 55120

Phone: 651.688.9116  
Email: info@tccmaterials.com  
Web: tccmaterials.com